

Spatial Estimates of Snow-Water Equivalent (SWE) Intermountain West Region April 14, 2020

Team: Noah Molotch^{1,2}, Dominik Schneider¹, Leanne Lestak¹, Benét Duncan², Jeff Lukas²

¹ Institute of Arctic and Alpine Research, University of Colorado Boulder

² Western Water Assessment, CIRES, University of Colorado Boulder

Data analysis and map production: Leanne Lestak

Support for technical development: NASA Jet Propulsion Laboratory (JPL)

Contact: Leanne.Lestak@colorado.edu

Summary of current conditions (as of 4/14/20)

As of April 14th, the modeled snow water equivalent (SWE) was generally in the range of 84% to 115% of the 2000-12 average across the Intermountain West (Figures 1 & 3). There remains a north-south gradient with the southern half of the domain exhibiting below average SWE (84% to 99%) and the northern basins above average (Figure 3). Please note that the basin-wide percent of average from the spatial SWE estimates is not directly comparable with the SNOTEL basin-wide percent of average; however, values from this report are generally in close agreement. A better comparison might be made with the % average in the elevation bands (Table 2) that contain SNOTEL sites.

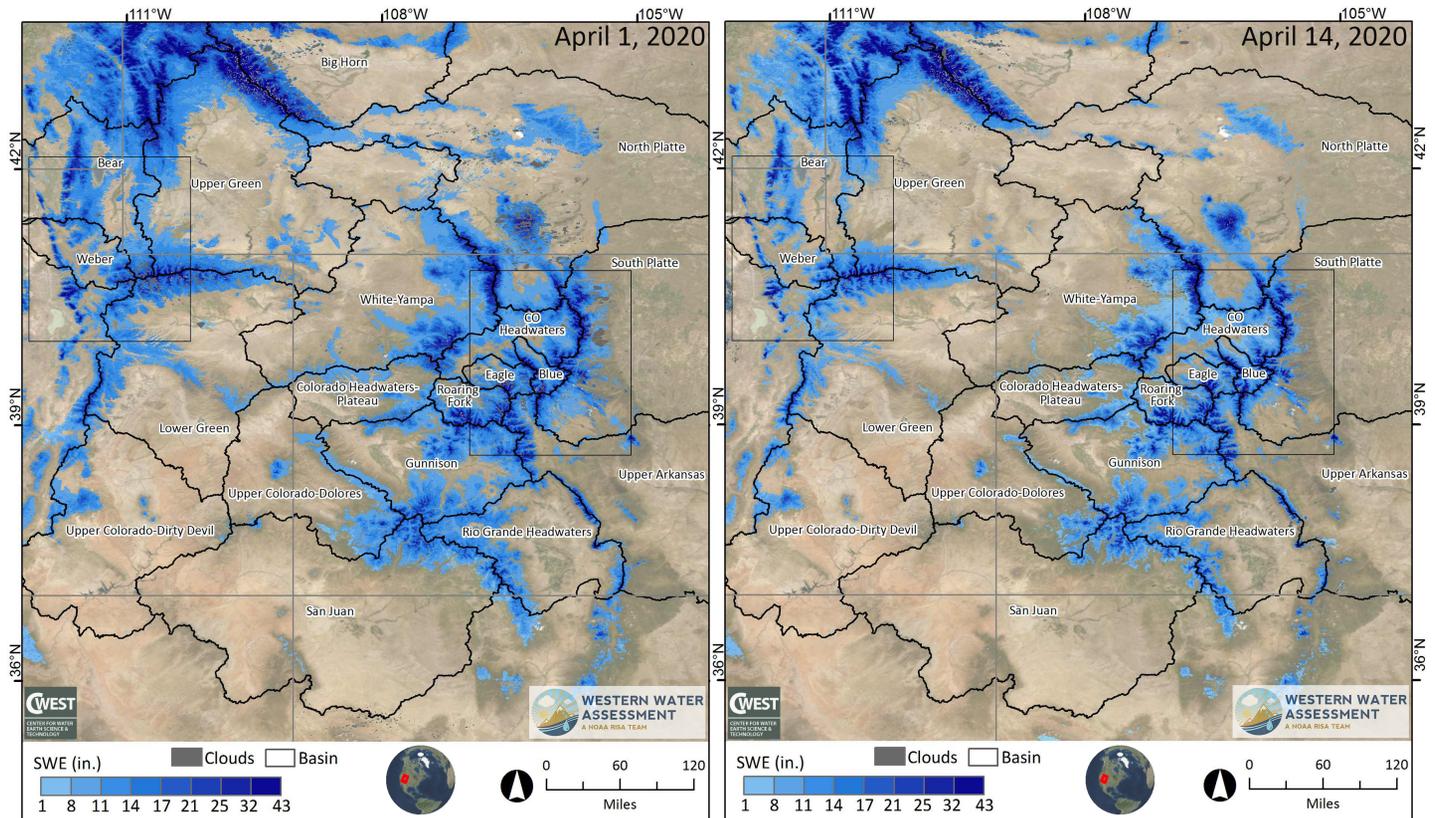


Figure 1. Estimated SWE amounts across the Intermountain West, April 14th.

Data Issues/Caveats for April 14, 2020

- DENSE FOREST COVER – Dense forest cover at lower elevations where snow-cover is discontinuous can cause the satellite to underestimate the snow-cover extent, leading to underestimation of SWE.
- CLOUD COVER – Cloud cover can obscure satellite measurements of snow-cover. While careful checks are made, occasionally the misclassification of clouds as snow or *vice versa* may result in the mischaracterization of SWE or bare-ground.

About this report

This is an experimental research product that provides near-real-time estimates of snow-water equivalent (SWE) at a spatial resolution of 500 m for the Intermountain West region (Colorado, Utah, and Wyoming) from mid-winter through the melt season. The report is released within a week of the date of data acquisition at the top of the report. A similar report covering the Sierra Nevada has been distributed to water managers in California since 2013-14.

The spatial SWE analysis method for the Intermountain West uses the following data as inputs:

- In-situ SWE from all operational NRCS SNOTEL sites and the CoCoRaHS network
- MODSCAG fractional snow-covered area (fSCA) data from recent cloud-free MODIS satellite images
- Physiographic information (elevation, latitude, upwind mountain barriers, slope, etc.)
- Historical daily SWE patterns (2000-2012) retrospectively generated using historical MODSCAG data and an energy-balance model that back-calculates SWE given the fSCA time-series and meltout date for each pixel

For more details on the estimation method see the *Methods* section below. Please be sure to read the *Data Issues / Caveats* section for a discussion of persistent challenges or flagged uncertainties of the SWE product.

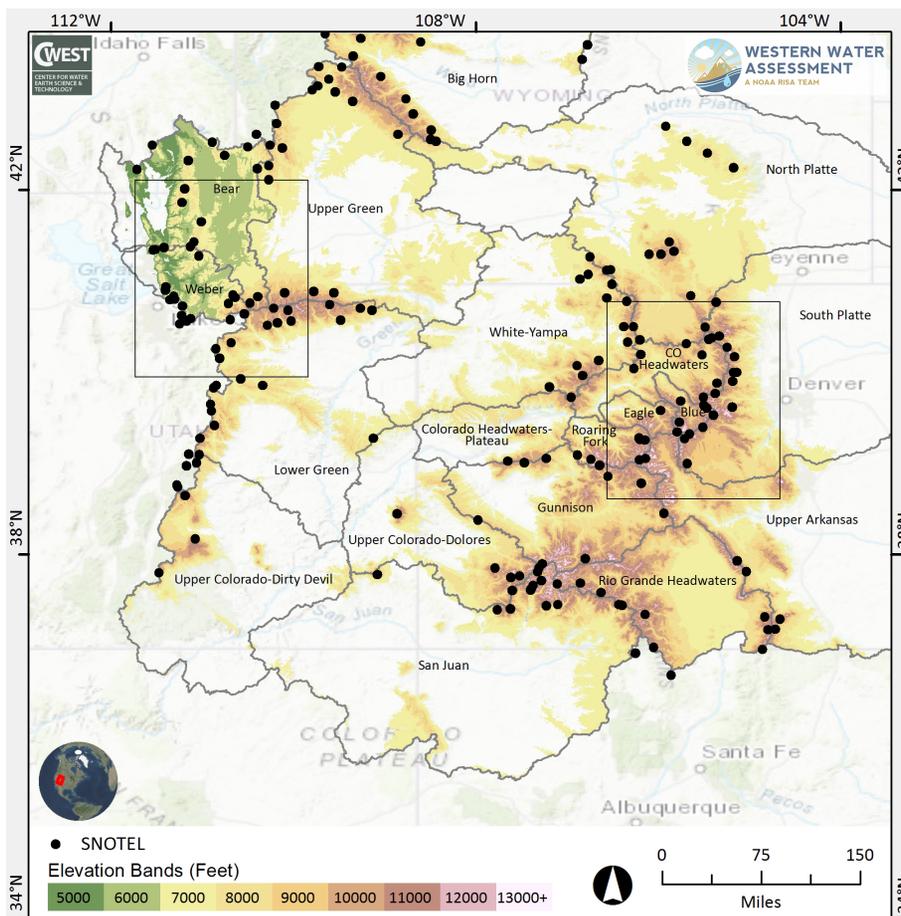


Figure 2. Intermountain West region. Location map identifies basins used in this report (gray boundaries), SNOTEL sites (black dots), and 1000' elevation bands (colored shading) that match those used in Table 1 and Table 2. The elevation bands below 7000' are shown only in the Bear and Weber basins. The Wasatch Front and Colorado Headwaters sub-regions are indicated by the small boxes.

Data availability for this report

306 SNOTEL sites in the Intermountain West network were recording SWE values out of a total of 312 sites; 2 were offline and 20 were recording zero SWE. CoCoRaHS measurements were not used for this report as most were below the snow line elevations.

The value of spatially explicit estimates of SWE

Snowmelt makes up the large majority (~60-85%) of the annual streamflow in the Intermountain West. The spatial distribution of snow-water equivalent (SWE) across the landscape is complex. While broad aspects of this spatial pattern (e.g., more SWE at higher elevations and on north-facing exposures) are fairly consistent, the details vary a lot from year to year, influencing the magnitude and timing of snowmelt-driven runoff.

SWE is operationally monitored at hundreds of NRCS SNOTEL sites spread across the Intermountain West, providing a critical first-order snapshot of conditions, and the basis for runoff forecasts from NRCS and NOAA. However, conditions at SNOTEL sites (e.g., percent of normal SWE) may not be representative of conditions in the large areas between these point measurements, and at elevations above and below the range of the SNOTEL sites. The spatial snow analysis creates a detailed picture of the spatial pattern of SWE using SNOTEL, satellite, and other data, extending beyond the SNOTEL sites to unmonitored areas.

Interpreting the spatial SWE estimates in the context of SNOTEL The spatial product estimates SWE for every pixel where the MODSCAG product identifies snow-cover. Comparatively, SNOTEL samples 8-20 points per basin within a narrower elevation range (Figure 2). Thus, the basin-wide percent of average from the spatial SWE estimates is not directly comparable with the SNOTEL basin-wide percent of average. A better comparison might be made with the % average in the elevation bands (Table 2) that contain SNOTEL sites.

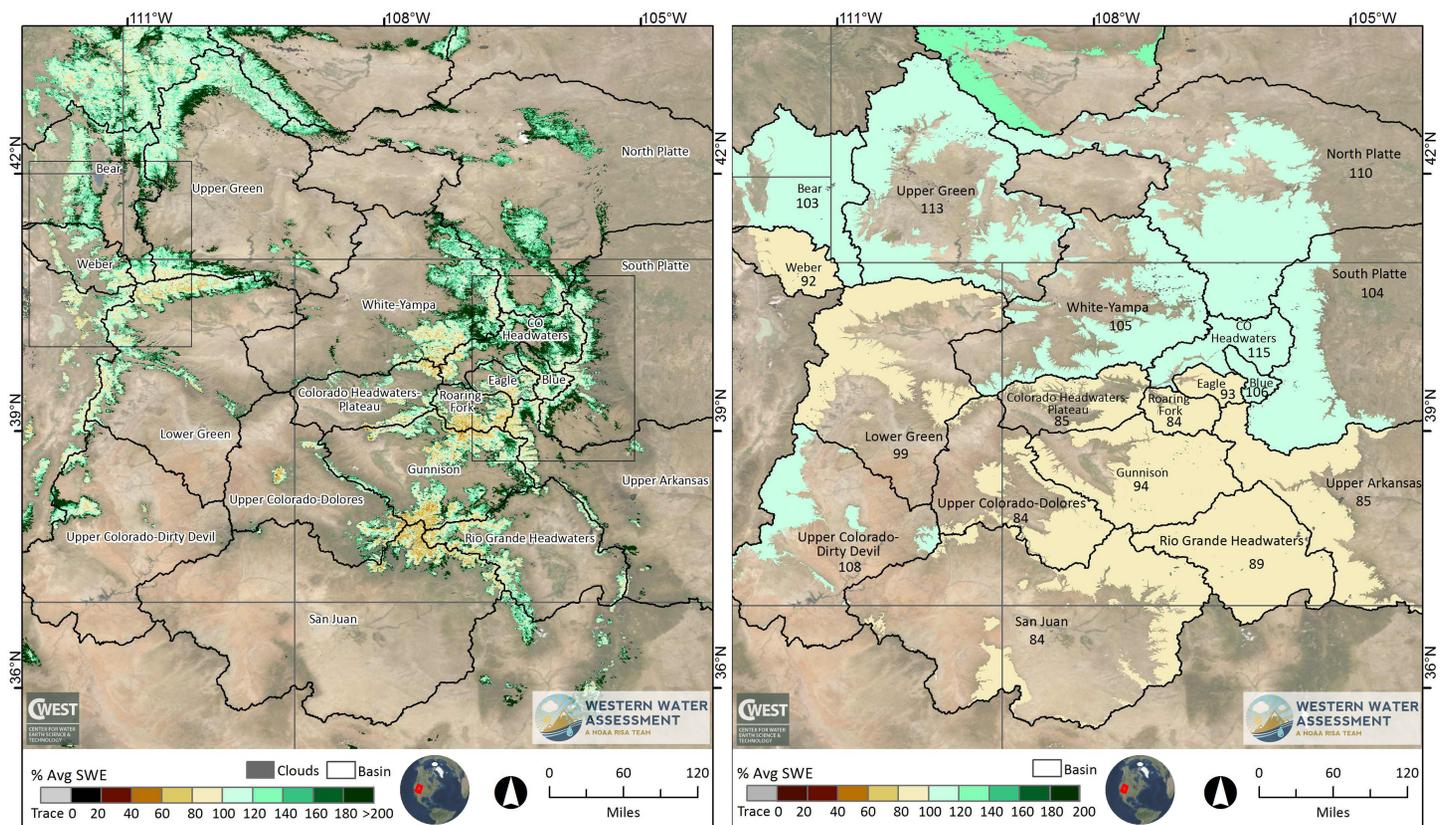


Figure 3. Estimated % of average SWE across the Intermountain West, April 14, 2020. Percent of average (2000-2012) SWE for April 14, 2020 for the Intermountain West, calculated for each pixel (left) and basin-wide (right). Some pixels at lower elevations are showing as dark green (>180% of average) due to persistent snow cover that greatly exceeds the average amount at these elevations (near-zero) for this time of year. Note that the basin-wide averages may reflect

variable conditions across the elevation bands; see Table 2. Basin-wide percent of average is calculated across all model pixels >7000' elevation (>5000' elevation in the Bear River/Weber basins).

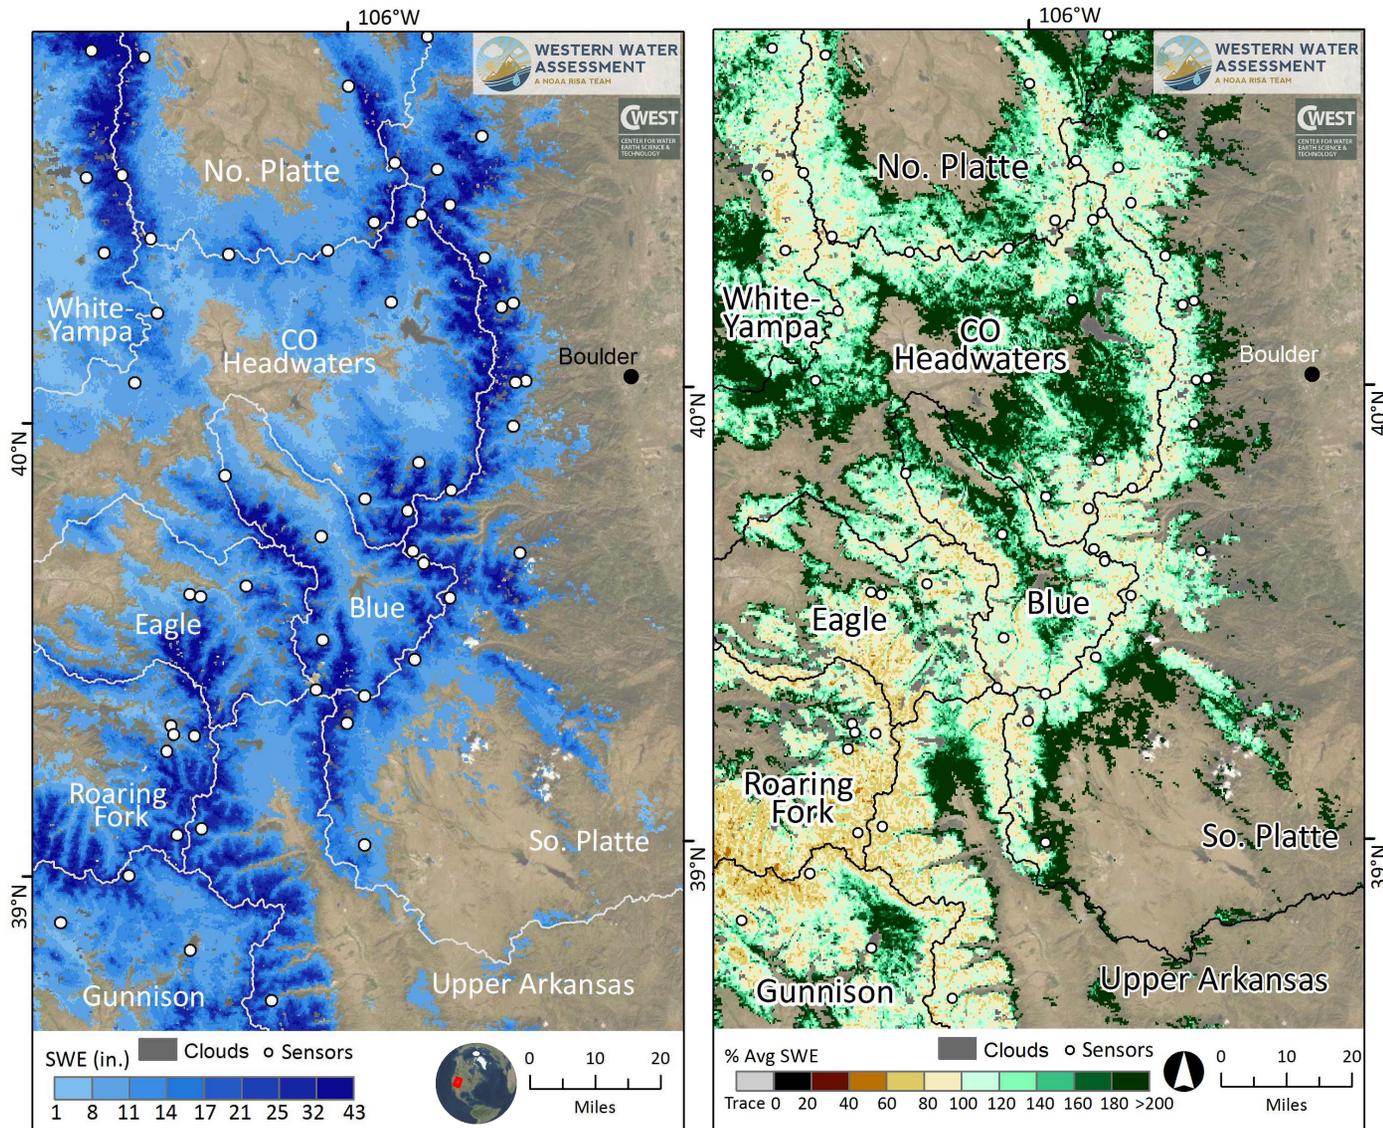


Figure 4. Estimated SWE across the Colorado Headwaters Sub-region, April 14, 2020. SWE amounts for April 14, 2020 (left), and the % of average (2000-2012) SWE for April 14, 2020 for the snow-covered area (right).

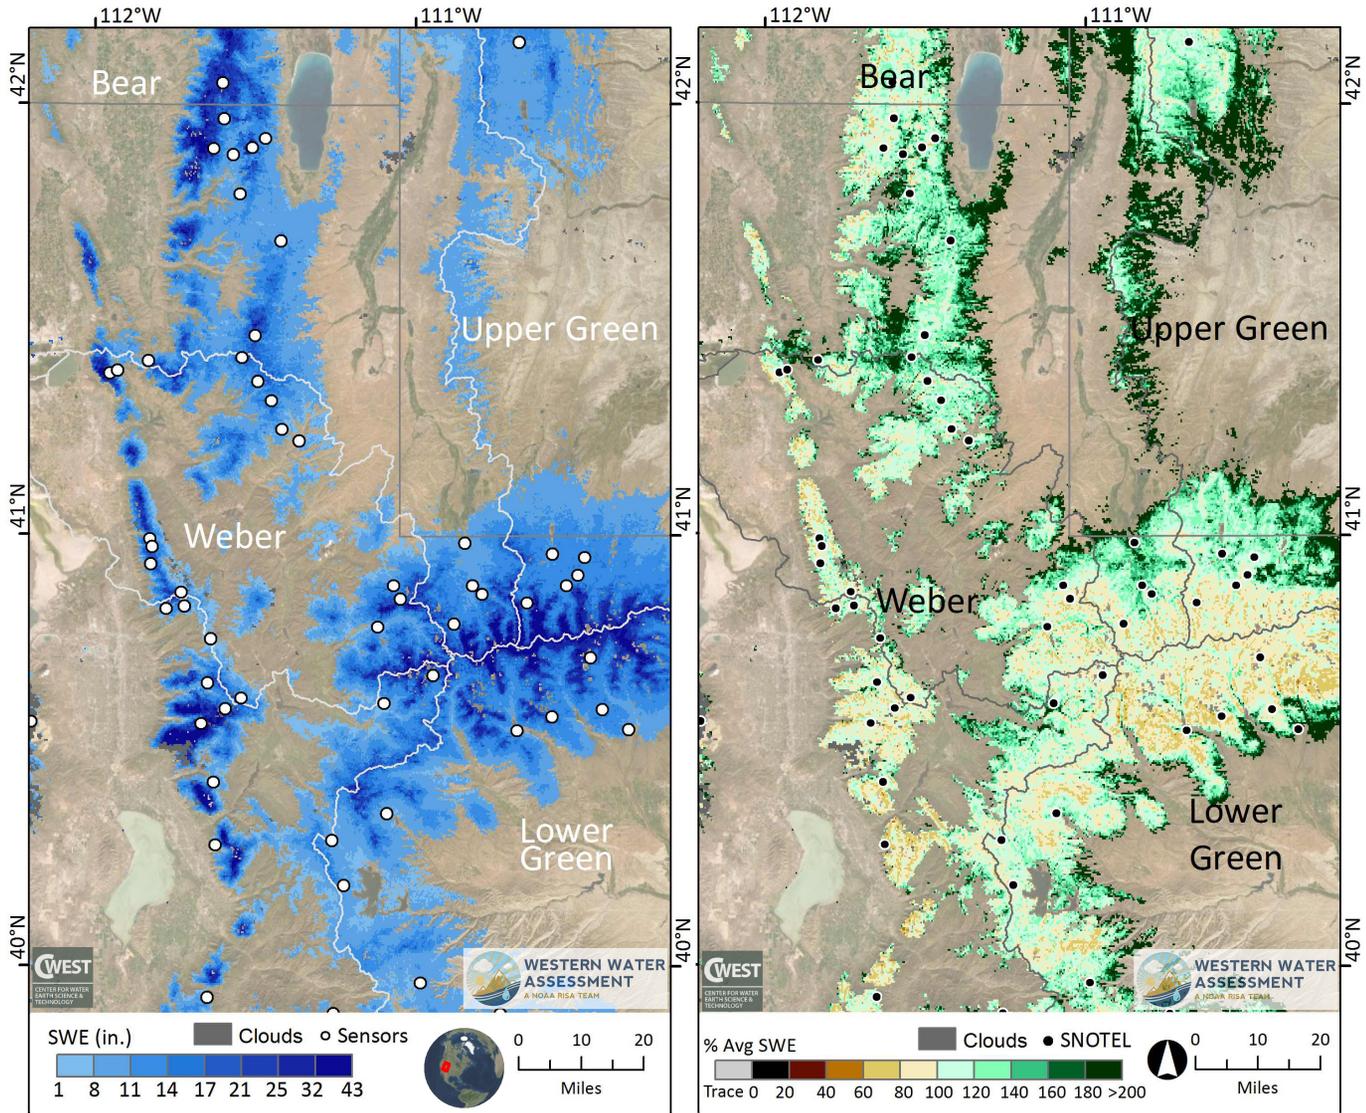


Figure 5. Estimated SWE across the Wasatch Front Sub-region, April 14, 2020. SWE amounts for April 14, 2020 (left), and the % of average (2000-2012) SWE on April 14, 2020 for the snow-covered area.

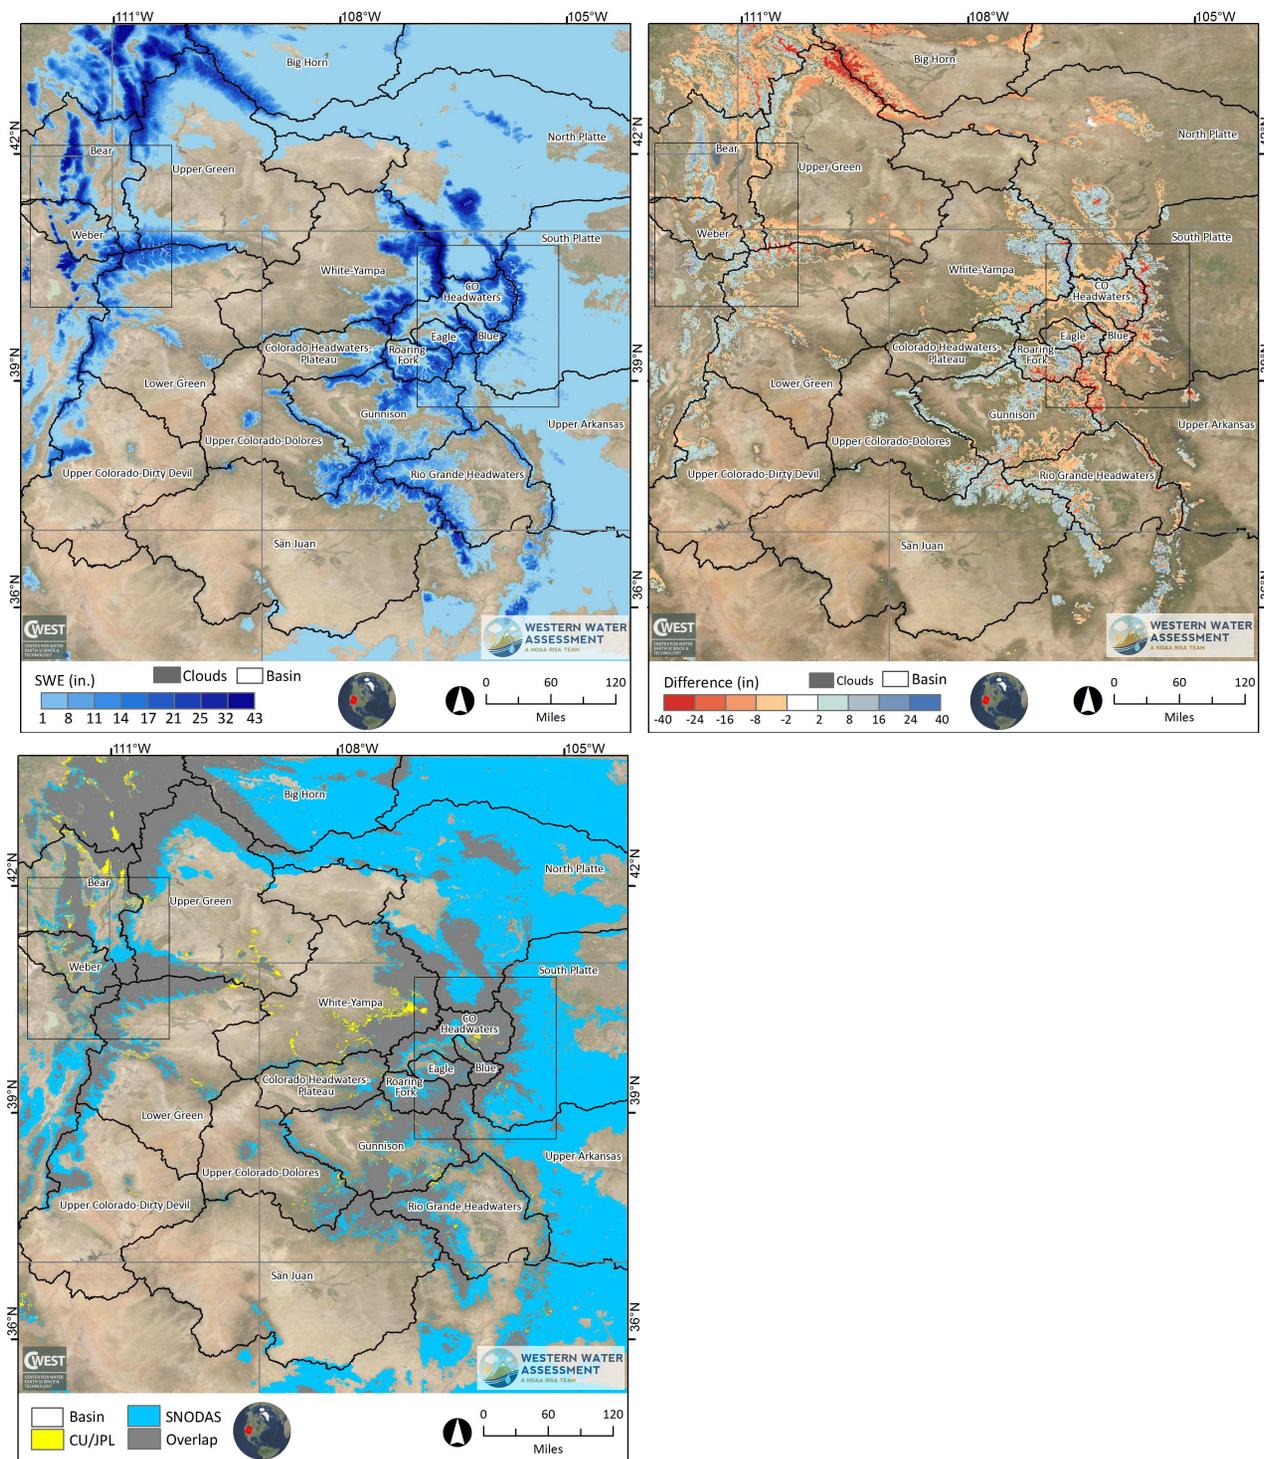


Figure 6. Comparison of the experimental (CU/JPL) SWE product and SNODAS SWE for the Intermountain West. The map in the upper left shows estimated SWE for April 14th from the NOAA National Weather Service's National Operational Hydrologic Remote Sensing Center (NOHRSC) SNOW Data Assimilation System (SNODAS). The upper right map shows the difference between the April 14th SNODAS SWE estimate and the experimental CU/JPL SWE estimate. Red pixels denote areas where SNODAS SWE is less than CU/JPL SWE and blue pixels show areas where SNODAS SWE is higher than CU/JPL SWE. The map in the lower left shows the snow-cover extent of SNODAS and CU/JPL SWE estimates. Yellow pixels show where the location of CU/JPL snow extends beyond the location of the SNODAS snow extent. Blue pixels show where the SNODAS snow extends beyond the CU/JPL snow extent. Gray areas indicate regions where both products agree on the snow-cover extent.

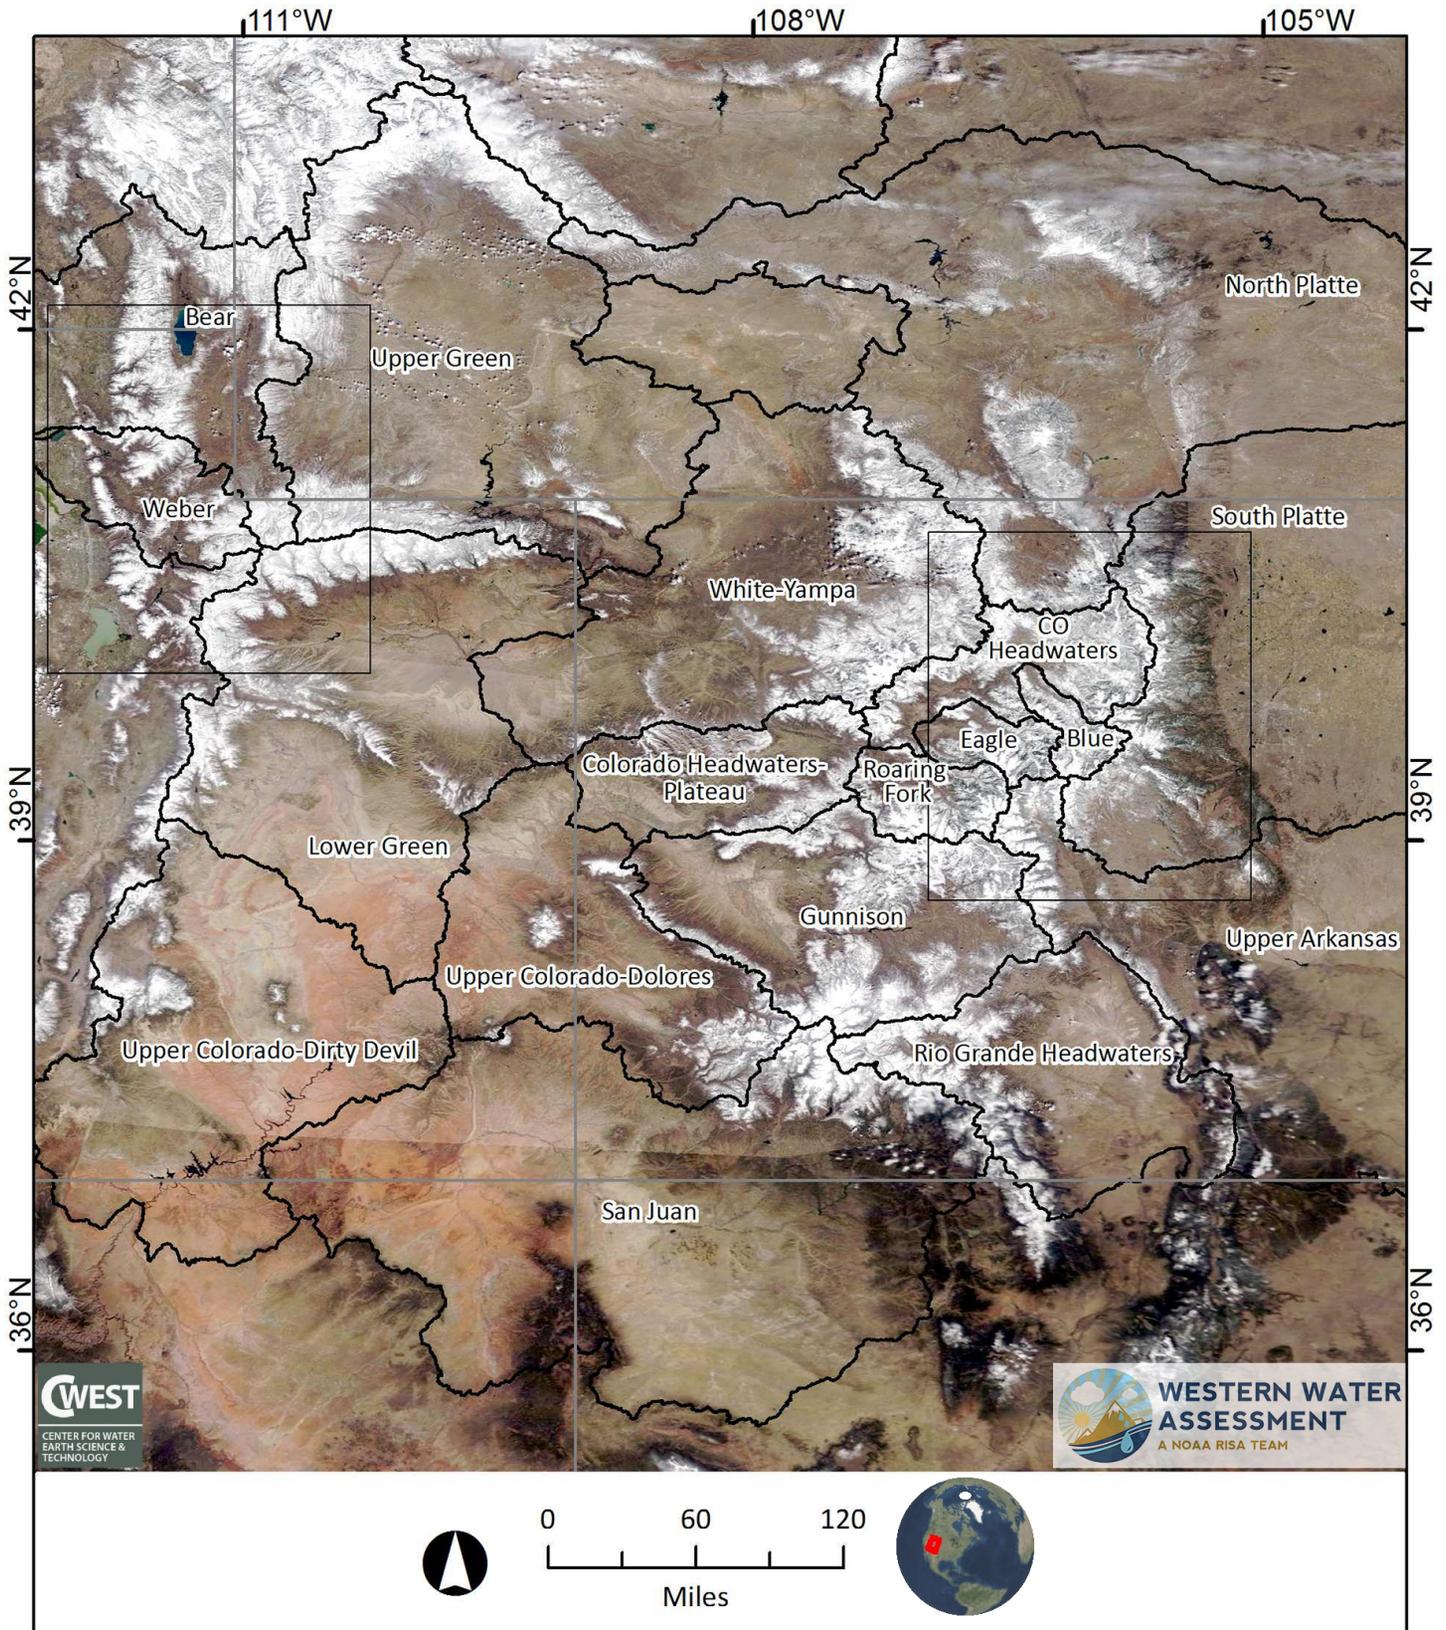


Figure 7. MODIS Image, Intermountain West. The April 14, 2020 cloud-free true color MODIS image composed from a few MODIS images that was used for the regression model run.

Table 1. Estimated SWE by basin. The basin-wide SWE values and averages, and areas, for all pixels at elevations >7000', except for the Bear and Weber basins, which are >5000'. Shown are April 1st percent of April 1st average SWE, April 14th percent of April 14th average SWE (2000-12 as derived from the regression model), April 1st mean SWE, April 14th mean SWE, April 14th percent of snow-covered area, April 14th water volume (acre-feet), the change in SWE between April 1st and April 14th, the area (mi²) inside each basin that contains data pixels (not including cloud-covered pixels, lakes or other satellite no data pixels), April 1st SNOTEL sensors (the number of stations are in parentheses), and April 14th SNOTEL sensors for those areas collected, summarized for each basin. For comparison, the last column shows April 14th basin-wide mean SWE from SNODAS*.

Basin	4/1/20 % 4/1 Avg	4/15/20 % 4/15 Avg	4/1/20 SWE (in)	4/15/20 SWE (in)	4/15/20 % SCA	4/15/20 Vol (af)	4/1 thru 4/15/20 Chg. in SWE (in)	4/15/20 Area (mi ²)	4/1/20 Sensors	4/15/20 Sensors	4/15/20 SNODAS* (in)
Bear	109.6	102.8	10.1	6.2	45.9	2,153,553	-3.8	6,481	18.2 (18)	16 (18)	6.1
Blue	106.3	106.2	16.4	15.4	88.5	591,110	-1.0	721	17.3 (6)	17.8 (6)	10.6
Colorado Headwaters	110.4	114.6	12.6	10.7	79.1	1,719,633	-2.0	3,023	17.4 (12)	16.7 (12)	9.2
Colorado Headwaters-Plateau	92.1	84.6	8.7	5.4	48.1	553,062	-3.3	1,903	12.2 (1)	11.6 (1)	5.9
Eagle	95.0	93.2	12.9	10.9	70.2	578,525	-2.0	994	15.3 (3)	14.2 (3)	10.4
Gunnison	98.1	93.6	9.4	7.1	56.6	2,557,312	-2.3	6,769	14 (11)	12.7 (11)	6.7
Lower Green	103.1	99.3	9.3	6.8	53.0	2,227,080	-2.5	6,115	13.9 (20)	12.2 (20)	6.6
North Platte	103.7	109.7	7.9	5.2	39.7	3,153,743	-2.7	11,397	22.2 (20)	21.3 (19)	4.6
Rio Grande Headwaters	92.6	89.0	4.5	3.4	25.3	1,431,608	-1.1	7,840	10.9 (14)	9 (13)	3.2
Roaring Fork	90.6	84.0	14.1	11.9	73.7	926,209	-2.2	1,454	17.7 (7)	16.7 (7)	11.2
San Juan	88.4	84.1	4.0	2.8	21.4	982,848	-1.2	6,665	17 (17)	15 (16)	3.7
South Platte	107.2	104.1	7.0	4.9	30.2	1,574,141	-2.2	6,069	14.4 (19)	14.7 (19)	4.0
Upper Arkansas	71.9	85.0	4.0	3.4	20.9	1,111,062	-0.6	6,196	9.6 (6)	8 (6)	2.2
Upper Colorado-Dirty Devil	106.8	107.8	5.0	3.2	28.0	467,647	-1.9	2,781	10.4 (4)	8.7 (4)	3.9
Upper Colorado-Dolores	96.5	83.7	5.5	2.9	26.5	555,039	-2.6	3,595	14 (7)	9.7 (7)	3.5
Upper Green	111.0	113.2	10.8	8.0	45.1	4,507,214	-2.8	10,605	15.5 (20)	15.4 (20)	5.5
Weber	96.9	91.7	8.8	5.7	45.5	683,153	-3.1	2,235	18.7 (15)	15.9 (15)	5.9
White-Yampa	104.2	105.0	10.2	7.3	57.1	2,490,205	-2.9	6,418	20.1 (14)	18.6 (14)	8.2

* This is a comparison to the SNODAS (SNOW Data Assimilation System) nationwide product from the National Weather Service.

Table 2. Estimated SWE by basin and elevation band. Elevation bands begin at 7000' and extend past the highest point in the basin, except for the Bear and Weber basins, which begin at 5000'. Note that the area of the highest 2-5 bands is typically much smaller than the lower bands. Shown are April 1st percent of April 1st average SWE, April 14th percent of April 14th average SWE (2000-12 as derived from the regression model), April 1st mean SWE, April 14th mean SWE, April 14th percent of snow-covered area, April 14th water volume (acre-feet), the change in SWE between April 1st and April 14th, the area (mi²) inside each basin that contains data pixels (not including cloud-covered pixels, lakes or other satellite no data pixels), April 1st SNOTEL sensors (the number of stations are in parentheses), and April 14th SNOTEL sensors for those areas collected, summarized for each 1000' elevation band within each basin. For comparison, the last column shows April 14th mean SWE for each 1000' elevation band from SNODAS*.

Basin	Elevation Band	4/1/20 % 4/1 Avg	4/15/20 % 4/15 Avg	4/1/20 SWE (in)	4/15/20 SWE (in)	4/15/20 % SCA	4/15/20 Vol (af)	4/1 thru 4/15/20 Chg. in SWE (in)	4/15/20 Area (mi ²)	4/1/20 Sensors	4/15/20 Sensors	4/15/20 SNODAS* (in)
Bear	5000-6000'	62.3	5.1	4.6	0.1	0.7	2,494	-4.5	843.4	0.5 (1)	NA	0.1
	6000-7000'	82.6	84.9	7.4	2.6	26.9	385,108	-4.8	2771.4	6.8 (4)	0.4 (3)	1.2
	7000-8000'	87.3	113.0	10.0	8.3	70.4	872,878	-1.7	1979.2	14.9 (8)	15.2 (8)	8.7
	8000-9000'	99.5	111.4	15.8	17.5	99.4	602,166	1.7	644.0	22.1 (6)	25.4 (6)	22.3
	9000-10,000'	101.2	105.5	18.1	20.7	99.1	159,148	2.5	144.5	12.4 (2)	14 (2)	21.5
	10,000-11,000'	99.5	96.4	20.4	23.3	100.0	102,996	2.9	83.1	NA	NA	22.4
	11,000-12,000'	108.0	96.8	31.7	35.3	100.0	26,001	3.6	13.8	NA	NA	19.7
	12,000-13,000'	111.9	101.4	34.2	39.1	100.0	2,762	4.9	1.3	NA	NA	14.0
Blue	7000-8000'	69.6	61.8	4.6	0.6	11.1	1,204	-4.0	35.1	NA	NA	0.1
	8000-9000'	75.5	157.8	6.7	6.2	74.7	35,234	-0.5	107.2	NA	NA	1.5
	9000-10,000'	89.1	145.6	8.8	9.8	92.1	67,265	1.0	129.2	6.5 (3)	10.5 (1)	6.2
	10,000-11,000'	92.1	110.3	11.3	13.3	95.0	139,364	2.0	197.2	17.6 (2)	20.5 (2)	14.2
	11,000-12,000'	96.2	95.0	19.3	22.8	99.4	214,769	3.5	176.9	15.5 (2)	18.4 (2)	17.2
	12,000-13,000'	103.6	98.2	27.7	32.9	100.0	120,083	5.2	68.5	NA	NA	12.8
	13,000+	114.5	107.3	30.0	35.8	100.0	13,191	5.8	6.9	NA	NA	5.1
Colorado Headwaters-Plateau	7000-8000'	79.8	40.9	5.8	0.5	6.9	18,183	-5.3	721.7	NA	NA	0.2
	8000-9000'	75.3	87.9	7.6	4.8	55.7	176,228	-2.8	691.3	NA	NA	3.9
	9000-10,000'	73.7	89.2	10.2	11.4	98.3	155,840	1.2	256.4	NA	NA	15.0
	10,000-11,000'	74.9	85.2	13.1	16.0	98.2	193,831	3.0	226.8	9.4 (1)	11.6 (1)	19.4
	11,000-12,000'	62.6	67.2	19.9	25.4	100.0	8,980	5.5	6.6	NA	NA	22.0
Colorado Headwaters	7000-8000'	82.8	93.9	5.3	0.8	11.5	20,127	-4.5	466.1	NA	NA	0.2
	8000-9000'	74.7	154.9	6.8	6.9	80.7	333,448	0.1	901.9	7.5 (6)	7.7 (3)	2.7
	9000-10,000'	87.4	132.1	9.1	10.9	97.7	454,794	1.8	780.6	13.3 (3)	14.5 (3)	12.0
	10,000-11,000'	88.7	101.6	12.7	15.5	97.1	505,995	2.8	611.0	18.8 (5)	22.1 (5)	19.2
	11,000-12,000'	96.8	94.7	23.2	27.6	99.6	338,576	4.4	229.7	19.3 (1)	22.8 (1)	17.8
	12,000-13,000'	105.4	100.9	31.4	37.6	100.0	66,226	6.2	33.0	NA	NA	10.0
	13,000+	105.8	96.4	36.3	42.0	100.0	468	5.7	0.2	NA	NA	6.4
Eagle	7000-8000'	80.8	84.2	5.4	0.6	9.1	5,651	-4.8	171.6	1.4 (1)	NA	0.2
	8000-9000'	79.4	116.6	7.8	5.6	64.9	58,060	-2.3	195.6	5.7 (2)	11.8 (1)	2.6
	9000-10,000'	75.7	104.2	8.3	9.1	83.3	88,735	0.7	183.6	12.3 (1)	12.7 (1)	10.5
	10,000-11,000'	73.2	92.2	9.8	12.7	85.7	181,564	2.9	267.1	17 (1)	18.1 (1)	17.3
	11,000-12,000'	86.3	86.4	19.3	23.4	97.4	173,540	4.0	139.3	NA	NA	19.1
	12,000-13,000'	91.5	85.8	30.8	36.3	100.0	66,343	5.6	34.2	NA	NA	13.8
	13,000+	100.6	94.6	33.5	40.2	100.0	4,631	6.7	2.2	NA	NA	7.0

Basin	Elevation Band	4/1/20 % 4/1 Avg	4/15/20 % 4/15 Avg	4/1/20 SWE (in)	4/15/20 SWE (in)	4/15/20 % SCA	4/15/20 Vol (af)	4/1 thru 4/15/20 Chg. in SWE (in)	4/15/20 Area (m ²)	4/1/20 Sensors	4/15/20 Sensors	4/15/20 SNODAS* (in)
Gunnison	7000-8000'	66.4	53.8	3.5	0.3	3.9	14,660	-3.3	1082.8	0 (1)	NA	0.1
	8000-9000'	77.9	77.0	6.4	2.1	26.6	198,429	-4.3	1786.0	14.3 (1)	12.7 (1)	2.2
	9000-10,000'	82.6	107.4	8.3	6.5	67.8	487,402	-1.8	1396.6	7.7 (4)	10.1 (2)	7.0
	10,000-11,000'	85.5	107.8	10.3	11.4	93.0	931,998	1.1	1530.9	12.4 (5)	14.4 (5)	12.3
	11,000-12,000'	84.5	85.3	14.1	16.2	99.4	584,587	2.0	678.4	10.9 (3)	11.7 (3)	13.9
	12,000-13,000'	80.5	75.7	18.7	21.6	98.4	310,469	2.8	270.1	NA	NA	12.4
	13,000+	81.9	74.4	20.0	22.7	95.4	29,767	2.8	24.5	NA	NA	8.6
Lower Green	7000-8000'	64.6	75.9	4.2	0.9	11.7	115,295	-3.3	2422.8	6.6 (1)	5.6 (1)	0.6
	8000-9000'	87.2	109.9	8.7	6.1	63.2	618,345	-2.6	1896.2	9.9 (9)	8.7 (9)	6.1
	9000-10,000'	88.2	106.2	11.3	11.9	95.7	558,984	0.6	877.5	13.1 (5)	15.5 (5)	13.8
	10,000-11,000'	90.3	94.1	14.4	16.6	99.9	592,736	2.2	670.6	12.4 (4)	15.5 (4)	17.2
	11,000-12,000'	89.7	87.1	21.0	24.7	100.0	273,788	3.7	208.0	16.5 (1)	20.1 (1)	14.9
	12,000-13,000'	104.0	96.0	27.0	31.4	100.0	65,310	4.4	39.0	NA	NA	10.1
	13,000+	114.5	102.2	30.5	35.3	100.0	2,622	4.7	1.4	NA	NA	4.7
North Platte	7000-8000'	73.8	77.1	4.4	1.6	17.7	616,378	-2.8	7088.7	4.7 (8)	12.4 (3)	0.8
	8000-9000'	76.0	128.0	6.9	6.9	63.3	1,002,700	0.0	2709.2	12.3 (5)	13.4 (5)	5.5
	9000-10,000'	89.6	131.8	10.0	14.1	97.2	727,248	4.1	966.9	21.4 (7)	21.7 (6)	16.9
	10,000-11,000'	92.3	112.7	16.0	22.3	98.4	669,835	6.3	564.2	25 (5)	28.8 (5)	26.1
	11,000-12,000'	98.5	100.3	30.4	37.9	97.7	129,590	7.5	64.2	NA	NA	20.6
	12,000-13,000'	104.4	102.3	34.1	41.3	94.5	7,993	7.3	3.6	NA	NA	8.8
	13,000+											
Rio Grande Headwaters	7000-8000'	0.3	5.9	0.0	0.0	0.0	73	0.0	2688.7	0 (3)	NA	0.0
	8000-9000'	47.1	3.5	1.5	0.0	0.3	1,213	-1.5	1481.6	0 (3)	NA	0.1
	9000-10,000'	88.5	44.5	5.7	1.0	11.1	58,768	-4.7	1099.1	6.6 (1)	NA	1.3
	10,000-11,000'	96.4	98.2	8.8	6.4	56.8	479,800	-2.4	1415.6	8.1 (7)	6 (7)	7.7
	11,000-12,000'	91.4	95.0	12.1	13.2	92.6	612,175	1.0	870.4	13.3 (5)	12.5 (6)	11.5
	12,000-13,000'	85.4	83.3	15.7	18.1	98.4	256,785	2.3	266.3	NA	NA	10.7
	13,000+	104.1	95.5	20.8	23.5	98.5	22,795	2.7	18.2	NA	NA	6.4
Roaring Fork	7000-8000'	81.5	87.5	5.8	0.6	9.9	6,769	-5.2	212.2	0.3 (1)	NA	0.5
	8000-9000'	80.2	118.7	7.8	5.0	62.5	73,772	-2.8	275.9	10.1 (1)	6.9 (1)	4.2
	9000-10,000'	79.2	100.2	9.1	8.8	82.9	115,830	-0.3	246.5	13.7 (2)	13.6 (2)	12.9
	10,000-11,000'	77.9	85.9	11.3	12.6	87.6	223,135	1.3	331.5	18.2 (3)	21 (3)	17.7
	11,000-12,000'	80.3	76.5	19.3	21.9	99.4	312,924	2.6	267.7	16.3 (1)	20 (1)	17.2
	12,000-13,000'	82.2	76.7	25.8	29.9	100.0	178,107	4.1	111.9	NA	NA	12.2
	13,000+	89.2	83.6	29.2	34.5	100.0	15,673	5.3	8.5	NA	NA	6.2
San Juan	7000-8000'	19.5	3.1	0.4	0.0	0.0	169	-0.4	3869.5	0 (3)	NA	0.0
	8000-9000'	75.5	50.3	4.1	0.3	4.4	19,380	-3.8	1097.9	12 (3)	9.2 (3)	0.9
	9000-10,000'	96.8	116.4	7.8	4.2	48.0	118,150	-3.6	533.4	6.5 (5)	3.4 (3)	7.4
	10,000-11,000'	94.2	100.6	11.0	10.2	92.4	291,037	-0.8	534.7	16.3 (5)	19.3 (5)	16.1
	11,000-12,000'	83.8	79.3	14.3	15.0	98.5	343,469	0.7	428.1	18.4 (5)	21 (5)	18.8
	12,000-13,000'	76.1	70.3	17.5	19.3	99.3	193,159	1.8	187.2	NA	NA	15.7
	13,000+	81.3	73.2	20.7	23.0	99.5	17,483	2.4	14.2	NA	NA	11.5
South Platte	7000-8000'	60.1	1.6	1.1	0.0	0.2	1,211	-1.1	1551.8	0.3 (11)	NA	0.7
	8000-9000'	101.5	63.2	3.6	0.9	9.9	77,051	-2.7	1585.0	1.7 (14)	6.1 (3)	1.4
	9000-10,000'	123.8	133.3	5.8	2.7	25.9	202,540	-3.1	1385.1	9.7 (6)	17.3 (4)	2.9
	10,000-11,000'	104.5	128.0	9.7	10.7	75.4	507,772	1.0	891.0	12.6 (10)	16.2 (9)	10.2
	11,000-12,000'	101.5	104.9	16.9	20.1	97.0	500,799	3.2	468.2	13.7 (4)	16.4 (4)	12.4
	12,000-13,000'	107.7	105.2	23.2	27.9	94.6	245,947	4.7	165.2	NA	NA	10.3
	13,000+	120.4	115.1	26.0	31.7	83.3	38,820	5.7	22.9	NA	NA	5.9

Basin	Elevation Band	4/1/20 % 4/1 Avg	4/15/20 % 4/15 Avg	4/1/20 SWE (in)	4/15/20 SWE (in)	4/15/20 % SCA	4/15/20 Vol (af)	4/1 thru 4/15/20 Chg. in SWE (in)	4/15/20 Area (mi ²)	4/1/20 Sensors	4/15/20 Sensors	4/15/20 SNODAS* (in)
Upper Arkansas	7000-8000'	2.8	26.4	0.0	0.0	1.3	4,366	0.0	1851.3	0 (6)	NA	0.3
	8000-9000'	32.8	35.8	1.0	0.2	3.9	20,182	-0.8	1578.1	0.1 (4)	NA	0.3
	9000-10,000'	82.3	58.3	4.3	1.0	11.2	68,020	-3.3	1231.0	4.7 (1)	0.6 (1)	0.8
	10,000-11,000'	94.0	89.7	8.0	5.7	47.8	238,990	-2.3	779.8	10.2 (3)	9.4 (3)	5.8
	11,000-12,000'	94.1	89.6	14.5	15.3	87.3	366,780	0.8	449.3	8.4 (2)	9.7 (2)	10.1
	12,000-13,000'	99.3	93.3	21.5	24.7	97.9	340,909	3.2	259.0	NA	NA	7.9
13,000+	109.1	100.2	24.6	28.6	95.7	71,815	3.9	47.1	NA	NA	4.3	
Upper Colorado-Dirty Devil	7000-8000'	45.2	42.2	1.3	0.0	0.3	1,080	-1.3	1190.0	NA	NA	0.0
	8000-9000'	94.8	102.4	6.4	1.2	14.5	53,729	-5.2	837.2	11.5 (1)	11.5 (1)	1.9
	9000-10,000'	98.8	127.9	9.9	7.8	77.9	165,208	-2.1	399.5	8.8 (2)	7.8 (2)	8.8
	10,000-11,000'	95.4	101.2	12.2	12.2	94.8	186,766	-0.1	288.0	6 (1)	7.9 (1)	16.0
	11,000-12,000'	87.4	93.1	14.5	17.2	100.0	60,866	2.7	66.3	NA	NA	17.2
Upper Colorado-Dolores	7000-8000'	58.8	9.4	2.5	0.0	0.2	847	-2.5	1490.6	NA	NA	0.0
	8000-9000'	81.3	50.3	6.1	1.0	12.6	58,475	-5.1	1120.2	7.1 (1)	2 (1)	1.5
	9000-10,000'	85.4	107.7	8.2	6.4	71.2	161,053	-1.8	472.0	10.4 (3)	8.1 (3)	7.5
	10,000-11,000'	90.5	98.4	10.3	10.0	88.8	184,776	-0.3	345.4	12.5 (3)	13.9 (3)	14.2
	11,000-12,000'	81.5	76.8	14.1	14.9	98.8	98,528	0.8	123.8	NA	NA	16.9
	12,000-13,000'	80.5	71.6	20.5	22.2	99.6	43,744	1.7	37.0	NA	NA	11.8
13,000+	82.7	72.9	23.7	25.9	100.0	7,615	2.3	5.5	NA	NA	7.5	
Upper Green	7000-8000'	80.4	105.2	6.1	2.1	20.7	798,125	-4.0	7117.9	5.5 (3)	10.3 (1)	1.3
	8000-9000'	87.2	121.2	10.8	12.0	88.7	1,131,991	1.2	1770.2	14.2 (10)	16.1 (10)	9.8
	9000-10,000'	100.3	115.3	15.8	19.3	99.5	888,284	3.5	863.9	12.5 (7)	14.6 (7)	16.8
	10,000-11,000'	103.0	112.6	24.6	32.0	99.6	1,052,669	7.4	617.5	14.6 (2)	17.8 (2)	20.3
	11,000-12,000'	101.7	109.7	37.0	49.9	98.9	532,504	12.9	200.2	NA	NA	17.7
	12,000-13,000'	91.4	106.9	37.3	55.5	93.9	100,978	18.2	34.1	NA	NA	13.1
13,000+	111.8	103.5	59.9	71.6	55.6	2,663	11.8	0.7	NA	NA	14.0	
Weber	5000-6000'	62.4	9.0	3.7	0.1	0.8	970	-3.7	296.1	NA	NA	0.0
	6000-7000'	80.5	49.8	7.0	1.3	15.4	57,481	-5.6	805.0	10 (2)	2 (2)	0.4
	7000-8000'	85.0	100.2	9.6	7.1	68.6	278,049	-2.5	735.3	19 (7)	18 (7)	6.6
	8000-9000'	93.0	104.2	13.9	14.4	98.4	200,154	0.6	260.1	15.5 (3)	16.8 (3)	19.1
	9000-10,000'	96.5	96.2	16.3	17.5	99.7	82,776	1.2	88.8	18.4 (2)	22.5 (2)	22.4
	10,000-11,000'	98.3	95.4	21.3	24.2	100.0	62,648	2.9	48.6	NA	NA	23.8
11,000-12,000'	97.7	91.4	28.3	32.1	100.0	1,076	3.8	0.6	NA	NA	22.1	
White-Yampa	7000-8000'	74.8	104.3	5.6	2.3	31.0	459,126	-3.3	3666.9	7.8 (3)	8.3 (1)	1.8
	8000-9000'	76.8	119.3	8.4	9.1	86.4	747,359	0.7	1533.0	16.3 (6)	18.4 (5)	11.0
	9000-10,000'	85.0	104.7	13.0	15.9	98.1	556,175	3.0	653.9	17.5 (6)	18.7 (6)	21.4
	10,000-11,000'	86.9	95.9	18.1	22.7	97.9	581,608	4.6	480.8	32 (2)	37.4 (2)	27.9
	11,000-12,000'	81.2	84.4	25.9	32.8	100.0	145,728	6.9	83.3	NA	NA	22.6
	12,000-13,000'	82.3	80.4	23.3	28.0	100.0	209	4.7	0.1	NA	NA	18.1

* This is a comparison to the SNODAS (SNOW Data Assimilation System) nationwide product from the National Weather Service.

Location of Reports, Excel Format Tables, and JPG Maps

<ftp://snowserver.colorado.edu/pub/Rockies/>

Methods

The spatial SWE estimation method is described in Schneider and Molotch (2016). The method uses linear regression in which the dependent variable is derived from the operationally measured in situ SWE from all online NRCS SNOTEL sites in the domain. The SNOTEL SWE observations are scaled by the fractional snow-covered area (fSCA) across the 500 m pixel containing that SNOTEL site before being used in the linear regression model. The fSCA is a near-real-time cloud-free MODIS satellite image which has been processed using the MODIS Snow Cover and Grain size (MODSCAG) fractional snow-covered area algorithm program (Painter, et. al. 2009, snow.jpl.nasa.gov)

The following independent variables (predictors) enter into the linear regression model:

- Physiographic variables that affect snow accumulation, melt, and redistribution, including elevation, latitude, upwind mountain barriers, slope, and others. See Figure 2 in Schneider and Molotch (2016) for the full set of these variables.
- The historical daily SWE pattern (2000-2012) retrospectively generated using historical MODSCAG data, and an energy-balance model that back-calculates SWE given the fractional Snow-Covered Area (fSCA) time series and meltout date for each pixel. See Guan, et. al., 2013 for details. (For computational efficiency, only one image from either the 1st or 15th of aa month during the 2000-2012 period that best matches the real-time SNOTEL-observed pattern is selected as an independent variable.)

The real-time regression model for this date has been validated by cross-validation, whereby 10% of the SNOTEL data are randomly removed and the model prediction is compared to the measured value at the removed SNOTEL stations. This is repeated 30 times to obtain an average R-squared value, which denotes how closely the model fits the SNOTEL data. During development of this regression method, the model was also validated against independent historical SWE data collected in snow surveys at 9 locations in Colorado, and an intensive field survey in north-central Colorado.

List of All Known Data Issues/Caveats

- RECENT SNOWFALL – There are occasionally problems with lower-elevation SWE estimates due to recent snowfall events that result in extensive snow-cover extending to valley locations where measurements are not available. This scenario results in an over-estimation of lower- elevation SWE.
- LIMITED SNOW PILLOW DATA – When snow at the snow pillow sites melts out, but remains at higher elevations, the model tends to underestimate SWE at the under-monitored upper elevations. This issue typically occurs late in the melt season, resulting in less accurate SWE prediction at higher elevations compared to earlier in the snow season.
- CLOUD COVER – Cloud cover can obscure satellite measurements of snow-cover. While careful checks are made, occasionally the misclassification of clouds as snow or *vice versa* may result in the mischaracterization of SWE or bare-ground.
- LOW LOOK ANGLE – When a satellite does not pass directly over a region but the area is still included within the satellite sensor’s field of view, this is referred to as a low “look angle”. The resulting image has lower effective resolution – this “blurry” MODSCAG data still contains useful information but may lead to overestimation of SWE near the margins of the snow-cover extent.
- POOR QUALITY SNOTEL DATA – Although data QA/QC is performed, occasional SNOTEL sensor malfunction may result in localized SWE errors.
- ANOMALOUS SNOW PATTERNS – Anomalous snow years or snow distributions may cause SWE error due to the model design to search for similar SWE distributions from previous years. If no close seasonal analogue exists, the model is forced to find the most similar year, which may result in error.
- DENSE FOREST COVER – Dense forest cover at lower elevations where snow-cover is discontinuous can cause the satellite to underestimate the snow-cover extent, leading to underestimation of SWE.

References and Additional Sources

- Guan, B., N. P. Molotch, D. E. Waliser, S. M. Jepsen, T. H. Painter, and J. Dozier. (2013). Snow water equivalent in the Sierra Nevada: Blending snow sensor observations with snowmelt model simulations. *Water Resources Research*, Vol. 49, 5029–5046, doi:10.1002/wrcr.20387.
- Painter, T.H., K. Rittger, C. McKenzie, P. Slaughter, R. E. Davis and J. Dozier. (2009) Retrieval of subpixel snow covered area, grain size, and albedo from MODIS. *Remote Sensing of the Environment*, 113: 868-879.
- Schneider D. and N.P. Molotch. (2016). Real-time estimation of snow water equivalent in the Upper Colorado River Basin using MODIS-based SWE reconstructions and SNOTEL data. *Water Resources Research*, 52(10): 7892-7910. DOI: 10.1002/2016WR019067.
- Molotch, N.P. (2009). Reconstructing snow water equivalent in the Rio Grande headwaters using remotely sensed snow cover data and a spatially distributed snowmelt model. *Hydrological Processes*, Vol. 23, doi: 10.1002/hyp.7206, 2009.
- Molotch, N.P., and S.A. Margulis. (2008) Estimating the distribution of snow water equivalent using remotely sensed snow cover data and a spatially distributed snowmelt model: a multi-resolution, multi-sensor comparison. *Advances in Water Resources*, 31, 2008.
- Molotch, N.P., and R.C. Bales. (2006). Comparison of ground-based and airborne snow-surface albedo parameterizations in an alpine watershed: impact on snowpack mass balance. *Water Resources Research*, VOL. 42, doi:10.1029/2005WR004522.
- Molotch, N.P., and R.C. Bales. (2005). Scaling snow observations from the point to the grid-element: implications for observation network design. *Water Resources Research*, VOL. 41, doi: 10.1029/2005WR004229.
- Molotch, N.P., T.H. Painter, R.C. Bales, and J. Dozier. (2004). Incorporating remotely sensed snow albedo into a spatially distributed snowmelt model. *Geophysical Research Letters*, VOL. 31, doi:10.1029/2003GL019063, 2004.